


NOTE: WHEN EITHER SIDES OR BOTTOM OF CHANNEL ARE OF GUNITE, CONG. OR MATERIAL OTHER THAN NATURAL SOIL, THE MATERIAL SHALL BE REPLACED IN KIND AFTER CONSTRUCTION OF DITCH CROSSING.

RESTORE ALL AFFECTED AREAS TO A CONDITION EQUAL TO OR BETTER THAN EXISTING.

COMPACTION OF TRENCH BETWEEN 25' OF EACH SIDE OF DITCH CROSSING SHALL BE 95% MIN. OF STANDARD DENSITY.

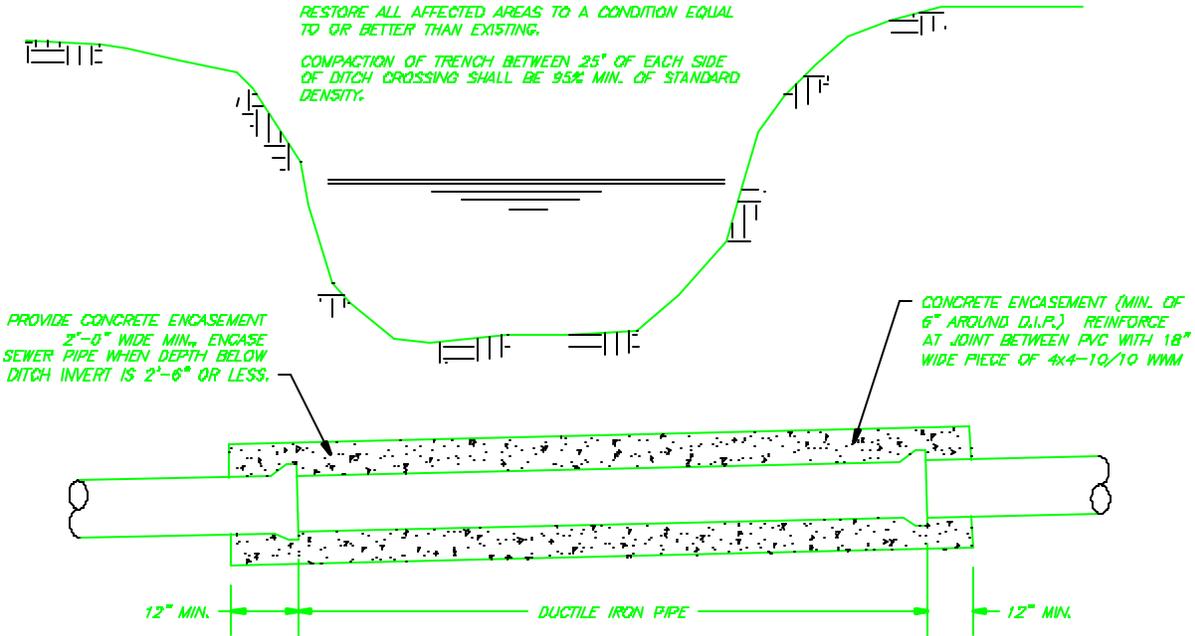

PROVIDE CONCRETE ENCASEMENT 2'-0" WIDE MIN., ENCASE SEWER PIPE WHEN DEPTH BELOW DITCH INVERT IS 2'-6" OR LESS.

CONCRETE ENCASEMENT (MIN. OF 6" AROUND D.I.P.) REINFORCE AT JOINT BETWEEN PVC WITH 18" WIDE PIECE OF 4x4-10/10 WWM

DITCH CROSSING DETAIL

NO SCALE

DITCH
CROSSING DETAIL

TOWN OF NEW CASTLE

NOT TO SCALE

DWG: SW-70