
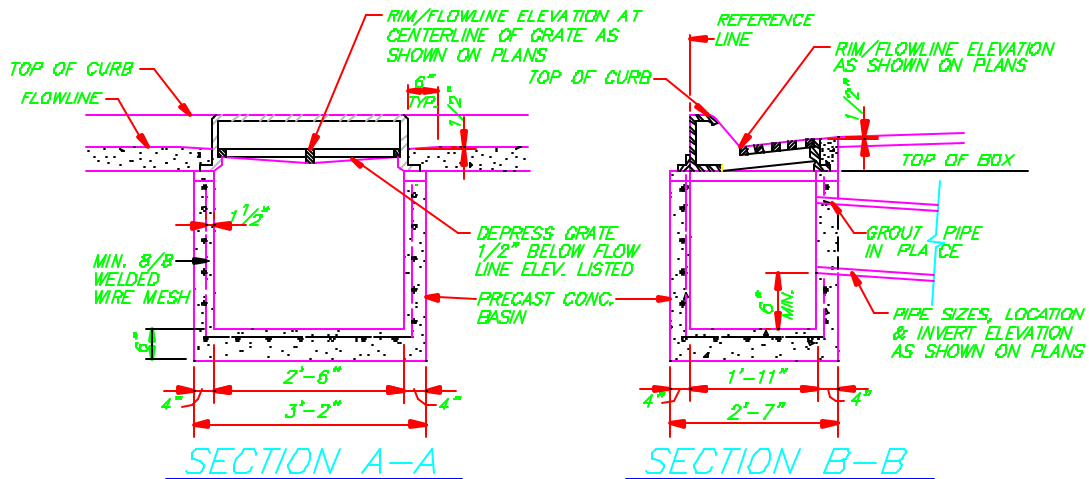


NOTES:

- 1) FRAME, GRATE & CURB INLET TO BE NEENAH R-3501-P OR APPROVED EQUAL.
- 2) DOUBLE INLET FRAME, GRATE & CURB INLET TO BE NEENAH R3504-F OR APPROVED EQUAL. (ABUTTING SIDE FLANGES TO BE OMITTED TO FORM DOUBLE). THE CONCRETE BASIN FOR THE DOUBLE INLET SHALL BE THE SAME AS SHOWN, EXCEPT THAT THE OVERALL WIDTH OF SECTION A-A SHALL BE 6'-10" RATHER THAN 3'-8".
- 3) FRAME & GRATE SHALL BE ASPHALT PAINT-DIPPED BY MANUFACTURER.
- 4) PRECAST CONCRETE ADJUSTMENT RINGS (IF REQUIRED) SHALL BE GROUTED IN PLACE.
- 5) SET GRATE W/ CONG. LEVELING COURSE TO MATCH LONGITUDINAL SLOPE OF THE ROAD.
- 6) INLET FRAME AND GRATE SHOWN ARE FOR MOUNTABLE CURB INSTALLATIONS. PROVIDE NEENAH R-3228-BD CURB INLET FRAME, DIAGONAL GRATE AND CURB BOX FOR VERTICAL CURB INSTALLATIONS.

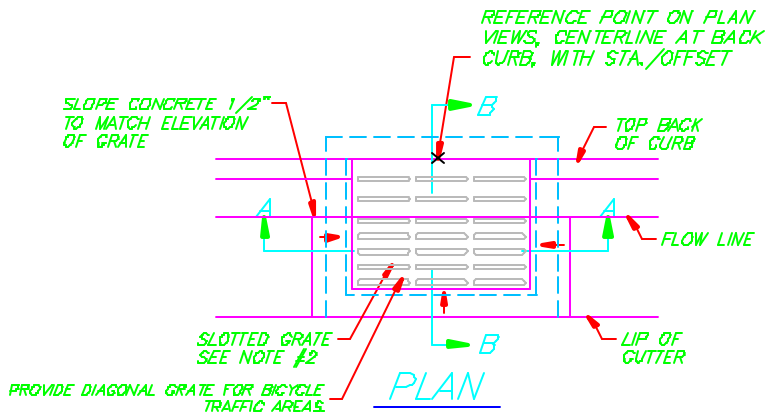

TYPE II DRAIN INLET

N.T.S.

DRAIN INLET
TYPE 2

TOWN OF NEW CASTLE

NOT TO SCALE

DWG: DR-100